


# optimat DE Endliche Keilriemen DIN 2216, gelocht Open-Ended V-Belts DIN 2216, Punched

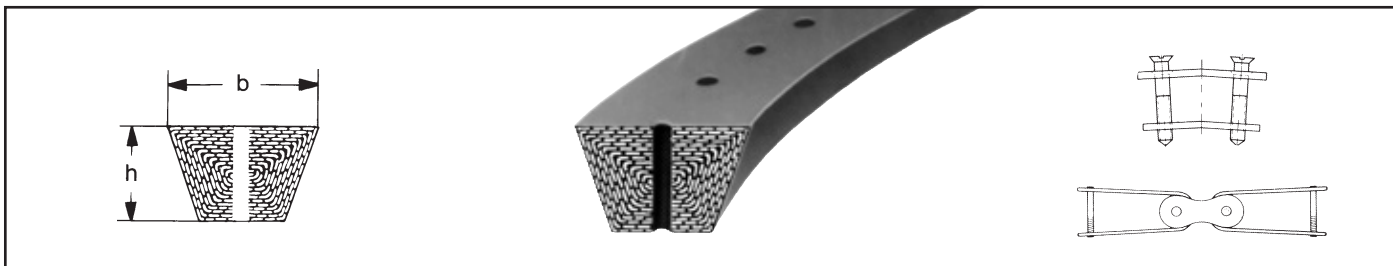

Profil Profile	Breite x Höhe Width x Height (mm)	Gewicht Weight (≈ kg/m)	Standard grüne Deckbänder green top surface	Polyester rote Deckbänder red top surface	Plattenverbinder Plate connectors		Gelenkverbinder Link connectors		Min.- Scheiben- durchmesser Min. pulley diameter (mm)
					Gewicht Weight (≈ kg/ 100 Stück pieces)		Gewicht Weight (≈ kg/ 100 Stück pieces)		
Y/6	6 x 4	0,030	■	■	0,100	■	—	—	50
8	8 x 5	0,050	■	■	0,200	■	—	—	63
Z/10	10 x 6	0,070	■	■	0,300	■	0,700	■	80
A/13	13 x 8	0,120	■	■	0,500	■	1,800	■	100
B/17	17 x 11	0,200	■	■	0,800	■	2,900	■	140
20	20 x 12,5	0,270	■	■	1,400	■	4,600	■	180
C/22	22 x 14	0,340	■	■	1,700	■	5,700	■	224
25	25 x 16	0,440	■	●	2,100	■	—	—	250
D/32	32 x 20	0,680	■	●	5,000	■	—	—	355
E/40	40 x 25	1,000	■●	●	10,000	■	—	—	500

### Sonderausführungen

Ausführung „S“ mit schwarzen Chloropren-Deckbändern lieferbar.


- Keine Lagerware.
- Auslaufartikel.

### Special constructions

Construction „S“ with black chloroprene top surface available.

- Non stock items.
- These items will be discontinued when present stock is depleted.

# optimat DK Endliche Doppelkeilriemen, gelocht Open-Ended Double V-Belts, Punched

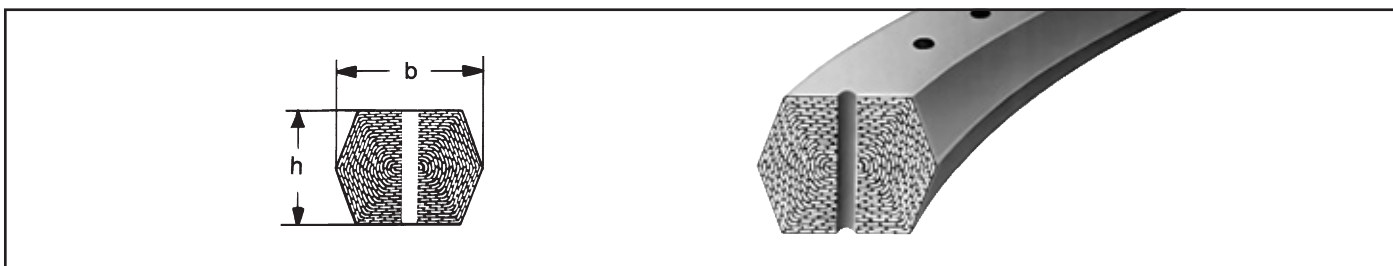

Profil Profile	Breite x Höhe Width x Height (mm)	Gewicht Weight (≈ kg/m)	Standard grüne Deckbänder green top surface	Plattenverbinder Plate connectors		Gelenkverbinder Link connectors		Min.-Scheiben- durchmesser Min. pulley diameter (mm)
				Gewicht Weight (≈ kg/ 100 Stück pieces)		Gewicht Weight (≈ kg/ 100 Stück pieces)		
AA/13	13 x 10,5	0,140	■	0,600	■	1,700	■	140
BB/17	17 x 14	0,250	■	1,200	—	2,600	■	160
20	20 x 16	0,320	■●	1,600	—	3,700	—	200
CC/22	22 x 18	0,410	■	2,200	■	4,400	—	224

### Sonderausführungen

Ausführung „S“ mit schwarzen Chloropren-Deckbändern lieferbar.

- Keine Lagerware.

### Special constructions

Construction „S“ with black chloroprene top surface available.

- Non stock items.